



**SUPREME BOND**  
**BORN FOR BONDING**

**TILES ADHESIVE | GROUT | EPOXY GROUT | WATER PROOFING |**  
**CONSTRUCTION CHEMICAL**

## ABOUT US

SUPREME BOND construction chemical company is considered as one of the leading supplier of construction chemical products in India. SUPREME BOND CONSTRUCTION CHEMICAL COMPANY is an ISO 9001-2015 certified company. SUPREME BOND is fastest growing Indian company in the field of construction chemical with the brand name of SUPREME BOND. Our product range of construction chemical such as epoxy and grout, adhesive,



## INDEX

|                       |    |
|-----------------------|----|
| SILVER ADHESIVE.....  | 01 |
| GOLD ADHESIVE.....    | 02 |
| DIAMOND ADHESIVE..... | 03 |
| STONE FIX.....        | 04 |
| TILE GROUT.....       | 05 |
| GROUT HARDNER.....    | 06 |
| EPOXY GROUT.....      | 07 |
| TILES LEVELER.....    | 08 |
| ACCESORIES.....       | 09 |





## SILVER ADHESIVE (GREY & WHITE)

POLYMER MODIFIED CEMENT BASED  
ADHESIVE FOR CERAMIC WALL &  
FLOOR TILES FOR INTERNAL USE.

### ► Features

- Suitable for fixing ceramic tiles for floor &
- Walls Polymer modified adhesive
- Good strength & Interior Situations
- Easy mixing & application

### ► Colour

Grey, White

### ► Packing Size

20 Kg



### ► Application Areas

Adhesive For All Ceramic Tiles On Wall - Porcelain And Vitrified Tiles  
Up To 600x1200mm On Floor

### ► Coverage

Approximately 4.5 to 5 m<sup>2</sup>/20kg @ 3mm thickness when using a thin trowel

## GOLD ADHESIVE (GREY & WHITE)

POLYMER MODIFIED CEMENT BASED  
ADHESIVE FOR CERAMIC WALL &  
FLOOR TILES FOR INTERNAL USE.



### ► Features

- High polymer modified adhesive
- Easy mixing & smooth application & better work ability
- High strength
- For use on walls and floors in interior & exteriors use

### ► Packing Size

20 Kg

### ► Application Areas

ADHESIVE GREAT TO USE FOR APPLYING CERAMIC PORCELAIN AND VITRIFIED  
TILES ON WALL AND FLOOR UP TO 600X1200MM GRANITE WINDOW FRAMING

### ► Coverage

Approximately 4.5 to 5 m<sup>2</sup>/20kg @ 3mm thickness when using a thin trowel

## DIAMOND ADHESIVE (GREY & WHITE)



**POLYMER MODIFIED CEMENT BASED  
ADHESIVE FOR CERAMIC WALL &  
FLOOR TILES FOR INTERNAL USE.**

- ▶ **Features**
  - High polymer modified adhesive
  - Easy mixing & smooth application & better work ability
  - High strength
  - For use on walls and floors in interior & exteriors use
- ▶ **Colour**  
Grey, White
- ▶ **Packing Size**  
20 Kg



- ▶ **Application Areas**  
ADHESIVE BEST SUITABLE FOR VITRIFIED TILES APPLICATION ON WALL AND FLOOR,  
INDOOR AND OUTDOOR USES IN VITRIFIED SIZE UP TO 600X1200MM, 800X1600MM,  
1200X1200MM & 200X1200MM.
- ▶ **Coverage**  
Approximately 4.5 to 5 m<sup>2</sup>/20kg @ 3mm thickness when using a thin trowel



# STONE FIX

(GREY&WHITE)

HIGH POLYMER MODIFIED CEMENT BASED ADHESIVE  
FOR VITRIFIED TILES ON WALL & FLOOR, GRANITE &  
NATURAL STONE FOR WINDOW SEALS, TILE ON TILE.



## ► Features

- High polymer modified adhesive
- Easy mixing & smooth application & better work ability
- High strength
- For use on walls and floors in interior & exteriors use

## ► Packing Size

20 Kg

## ► Application Areas

ADHESIVE BEST FOR ALL KIND HEAVY DUTY LARGE TILES (1200X2400MM, 1200X1800MM, 1600X3200MM, 800X2400X15MM, 800X3000X15MM) ITALIAN MARBLES, GRANITE & NATURAL STONES.

## ► Coverage

Approximately 4.5 to 5 m<sup>2</sup>/20kg @ 3mm thickness when using a thin trowel

# TILE GROUT



## Polymer Modified Grout For Wall & Floor Tile Joints

- **Features**
  - Polymer Modified Grout
  - Good Compressive Strength
  - Available in range of colors
  - Easy to use
  - Non shrink
  - Durable
  - Abrasion Resistance

- **Packing Size**
  - 1 Kg.



- **Application Areas**
  - wall | Floors | Interiors & Exteriors | Dry Area Work Tops
- **Coverage**
  - Consumption Depend on Joint Width, Size of Tiles and Good Workmanship.

# GROUT HARDENER

Use For Hard Bonding Of Grout, With All Types Of Grout.



## ► Features

- Polymer additive for cement Polymer Grouts, Super Grouts & Wide Joint Grouts
- Improves the flexibility for cement Polymer Grouts, Super Grouts & Wide Joint Grouts
- Improve the strength
- High strength
- Increase the abrasion resistance Grouts
- Best For Water resistance

## ► Packing Size

100ml, 200 ml, 500ml & 1 Ltr.

## ► Application Areas

Use With All Type Of Cementos Grout

## ► Coverage

Consumption Depend on Joint Width, Size of Tiles and Good Workmanship.



# EPOXY GROUT

## Polymer Modified Grout For Wall & Floor Tile Joints



### ► Features

- Stain Free
- Colour Fast
- Easy to install clean
- Water cleanable when fresh
- Non-creaking or powdering
- anti-Bacterial and Anti-Fungal
- Chemical & Temperature Resistance
- Anti acidic
- U. V. Protective
- Easy maintenance
- Available in range
- Hard & durable joints
- High strength & VERSATILE
- Waterproof & durable joints

### ► TYPE

Epoxy Available With Sparkle Effect

Epoxy Available Without Sparkle Effect



### ► Application Areas

wall | Floors | Interiors | Dry & Wet areas | Work tops | Showers | Swimming Pools | Heavily trafficked floors | Hygienic sterile | Chemical resistance areas | hydrotherapy Pools

### ► Coverage

Consumption Depend on Joint Width, Size of Tiles and Good Workmanship.

### ► Packing Size

1 kg & 5 kg

# TILES LEVELER

Tiles Leveling And Equalizing Surface



- **Application Areas**  
Wall | Floors | Interiors | Exteriors | Dry & Wet areas  
Showers | Swimming Pools
- **Packing Size**  
50 (Clip) + 50 (Wedge)




| Area<br>Size | 1m | 2m | 5m  | 10m | 20m | 50m  |
|--------------|----|----|-----|-----|-----|------|
| 30x30 cm     | 12 | 24 | 60  | 120 | 240 | 600  |
| 40x40 cm     | 25 | 50 | 125 | 250 | 500 | 1250 |
| 50x50 cm     | 15 | 30 | 75  | 150 | 300 | 750  |
| 30x60 cm     | 18 | 36 | 90  | 180 | 360 | 900  |
| 60x60 cm     | 12 | 20 | 50  | 100 | 200 | 500  |
| 80x80 cm     | 10 | 20 | 45  | 80  | 140 | 360  |

# ACCESSORIES



## NOTCH TROWEL

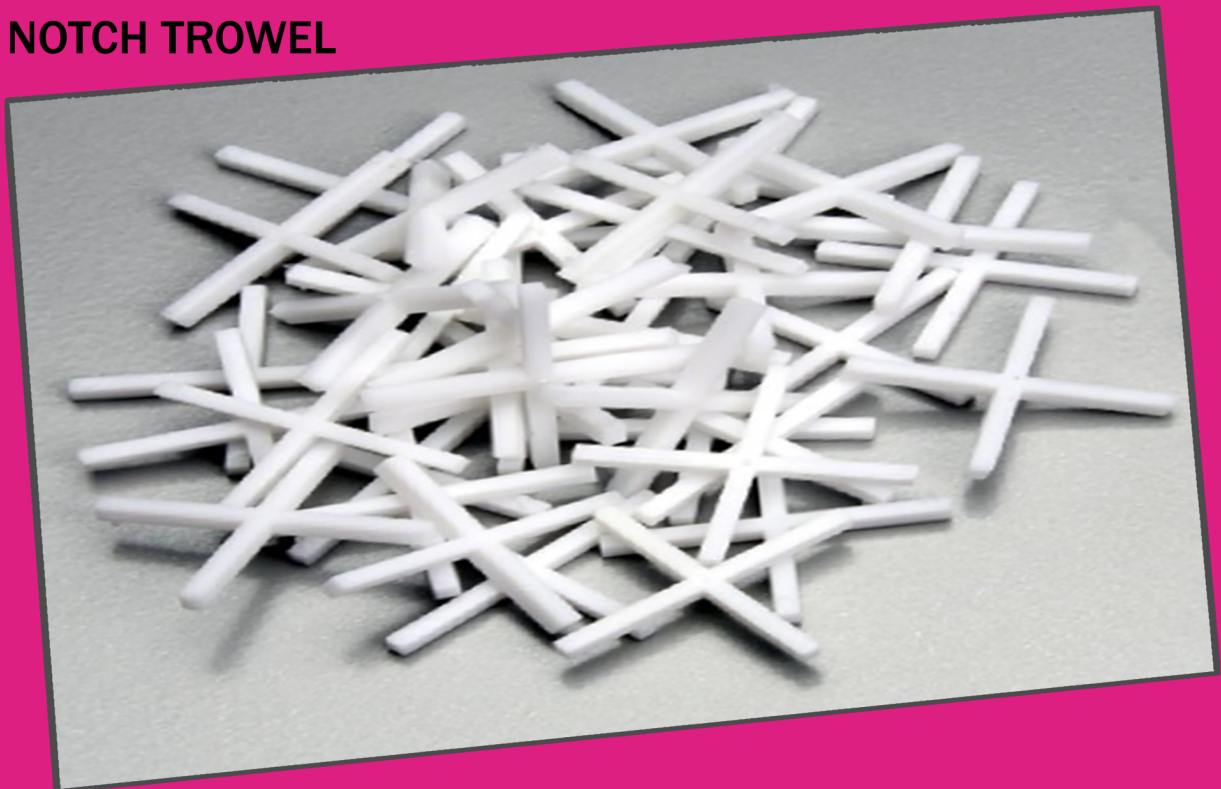

## SPACER